


## AUTOMATIC BICYCLE RIM BENDING LINE

(for single, double and triple wall rims)

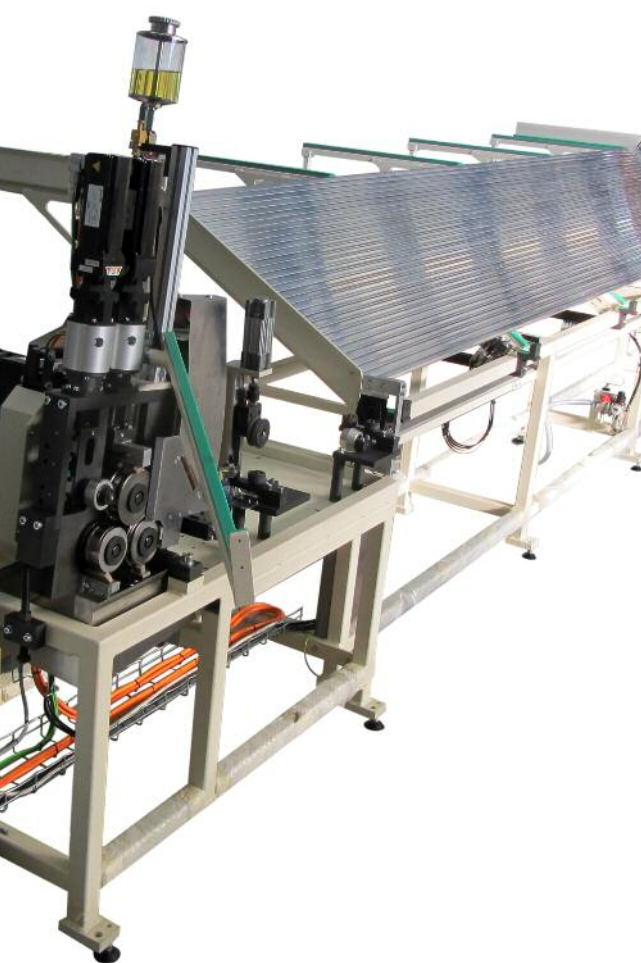

### Composed of:

- Automatic loading magazine of profiles (capacity up to 50 profiles)
- A rim marking station by rollers (optional)
- A strengthened bending unit by 4 lubricated rollers which can be adjusted axially and radially, driven by electric motor with variable speed
- A spiral reception arm with automatic stop and go device depending on its filling up

### Technical specifications

- Range: 14" to 29"
- Production capacity: 500 / 600 rims / hour
- Working air pressure: 6 bar or 90 PSI
- Air consumption: 10 L / min
- Electrical connection: As required by customer
- Power consumption: 2 Kw
- Weight: 390 Kg
- Dimensions: 7.20 x 1.35 x 1.60 m
- Safety mark: CE