




## AUTOMATIC BICYCLE RIM HOLE DRILLING MACHINE

(for single, double and triple wall rims)

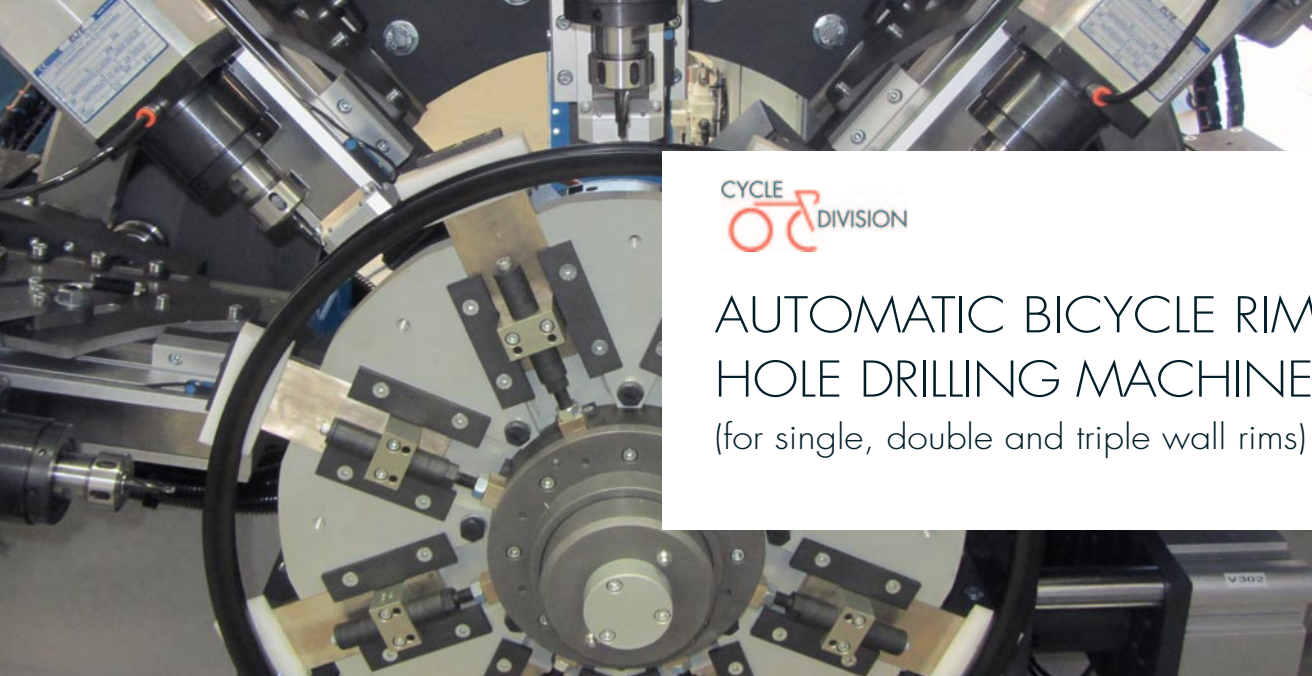

This machine is vertical and equipped with an automatic rim loading / unloading system linked to a rim joint indexing station.

Equipped with 5 high speed drilling heads (up to 22 000 rpm) angularly and radially adjustable, particularly suitable for any drilling configuration.

Rim holder plate driven by torque motor ensuring a very accurate positioning and drilling

The machine and the drilling adjustments are PLC driven

Closed loop drilling tool lubrication with filter.

### Technical specifications

- Range: 16 to 29"
- Production capacity: 200 rims /hour
- Working air pressure: 6 bar or 90 PSI
- Air consumption: 150 L/min
- Electrical connection: As required by customer
- Power consumption: 12 kW
- Weight: 1000 Kg
- Dimensions: 2.50 x 3.80 x 2.40 m (W x D x H)
- Safety mark: CE



**cera**  
ENGINEERING

2 rue du huit mai 1945  
BP12 - 42390 Villars - France  
tel. : +33 4 77 92 25 92  
fax : +33 4 77 74 50 03  
e-mail : [contact@cera-groupecera.com](mailto:contact@cera-groupecera.com)  
website : <http://www.cera-groupecera.com>